



SPLIT CORE CURRENT TRANSFORMERS



SCT 166/165

For currents from 800A to 4000A

Type: split core

Standards: acc. to BS 3938, EN 60044-1 and DIN 42600 standards

Technical data:

Class of accuracy: 1 ... 3 (see table)

Rated burden: max. 30 VA (see table)

Rated voltage: 720 V

Rated frequency: 50-60 Hz

Rated sec. current: 5 A (or 1 A on request)

Security factor: **FS 5** FS10

Working temperature range: -20 ... +45°C

High voltage test: 4 kV_{eff}, 50 Hz, 1 min

Insulation class: E (max. 120°C)

Protection: IP 00

Case: made of non-flammable plastic, UL 94 V-0



Rated primary current I_n	Ac. cl.	Type: SCT 166/165						
		Busbar hole 167x62 mm (see fig.)						
		Rated burden (VA)						
		1,5	2,5	5	7,5	10	15	20
800 A	1			x				
	3				x			
1000 A	1			x	x			
	3					x		
1250 A	1			x		x		
	3						x	
1500 A	1			x		x	x	
	3							x
1600 A	1			x		x	x	
	3							x

Rated primary current I_n	Ac. cl.	Type: SCT 166/165				
		Busbar hole 167x62 mm (see fig.)				
		Rated burden (VA)				
		5	10	15	20	30
2000 A	1	x	x	x	x	
	3					x
2500 A	1	x	x	x	x	
	3					x
3000 A	1	x	x	x		x
	3					
4000 A	1	x	x	x		x
	3					

Outline drawing

Dimensions in mm


Order specification:

- Split core current transformer
- Class of accuracy: 1
- Rated primary current: 4000 A
- Rated secondary current: 5 A
- Rated burden: 15 VA
- Busbar dimension: 3x160x10 mm

SCT 166/165	4000/5 A	Cl. 1	15VA
--------------------	-----------------	--------------	-------------

Note:

On request orders for types different from table are accepted.

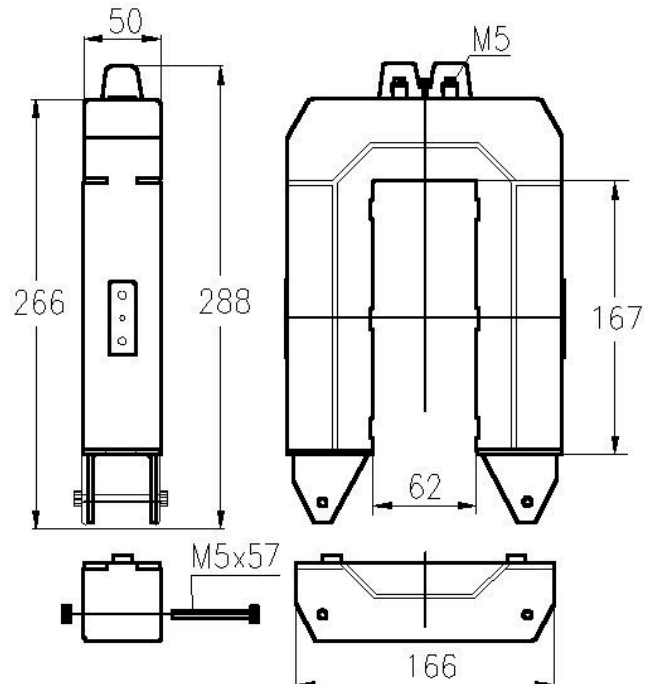

Weight: 1500-1800 gr